

PULSEO
GENERATION

HS15 E / HS18 E



HIGH PERFORMANCE & ROUGH TERRAIN CAPACITIES

- > Platform capacity of 750 kg
- > Drive axle with manual locking rear differential increases ground traction

FULL ELECTRIC DRIVE

- > Silent & clean operations
- > Versatile use: outdoor / indoor
- > Smooth & proportional movements

MAINTENANCE AND SERVICE-ORIENTED

- > Activ'Screen: on-board configuration & diagnostic interface
- > Easy access to components
- > Activ'Energy Management takes care of your battery

EXTENDED DUTY CYCLES


- > Multiple charging modes including optional accelerated charge
- > Optional & removable, low fuel consumption Range Extender (Stage 5)

HS15 E / HS18 E

ELECTRIC ROUGH-TERRAIN SCISSOR LIFT

TECHNICAL DATA

	HS 15 E	HS 18 E
Working height	15 m	18 m
Platform height	13 m	16 m
Max. drive working height	15 m	13 m
Lift capacity	750 kg	
Lift capacity on the extension	225 kg	
A Platform length - outside	3.82 m	
Platform length - extended	4.8 m	
Length - extension	0.93 m	
B Platform width - outside	1.89 m	
C Height - stowed	3.05 m	3.15 m
Height - guardrails lowered	2.19 m	2.29 m
D Overall width	2.3 m	
E Length	4.4 m	
F Wheelbase	2.76 m	
G Ground clearance	30.7 cm	
Drive speed	5 km/h	
Gradeability	45 %	40 %
Tilt (lonitudinal / lateral)	5° / 3°	5° / 2°
Turning radius - outside	6.75 m	
Tyres	830 x 285 mm	
Batteries	8 x 6 V - 435 Ah (C20)	
Weight	7 480 kg	8 010 kg

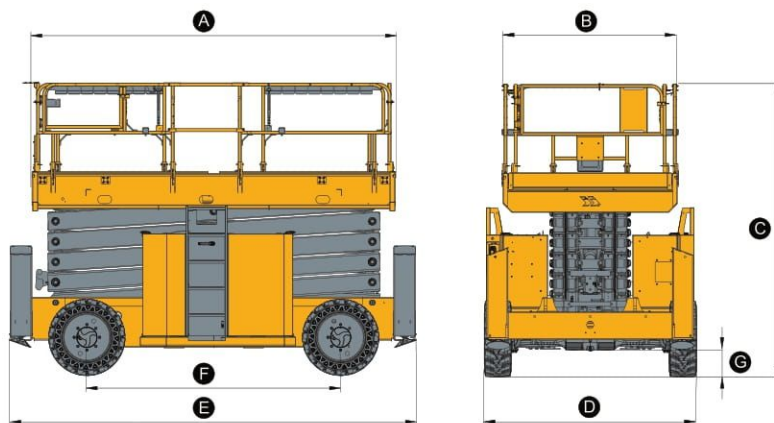


STANDARD EQUIPMENT

- > 4 wheel drive
- > Mechanical axle with manual locking rear differential
- > Outriggers with centralized or individual controls
- > One platform extension
- > Two drop bar entries
- > Folding handrails
- > Haulotte Activ'Energy Management: smart battery management system & manual centralized watering
- > AC motors
- > 48V battery pack
- > Haulotte Activ'Screen

OPTIONS AND ACCESSORIES

- > Double swing gate entries
- > XL platform with dual extensions (7.4 m)
- > Range Extender (5.5 kW - Stage 5)
- > Accelerated charger (380 V)
- > Automatic battery water-filling system
- > Cold & arctic weather kits
- > Non marking tires
- > Material handling rack
- > AC power to platform plug (110 / 230 V)
- > Scissors stack protection
- > Platform lighting
- > Work light
- > Telematics holder & predisposition
- > Telematics solutions

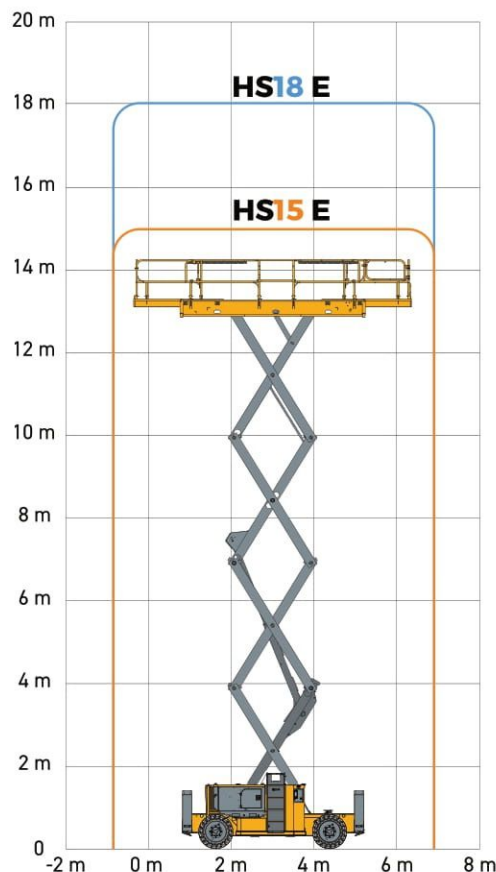

4001119750 - We reserve the right to modify the technical characteristics of this document without notice - 09/2020



WILAN
Merchandising Phils., Inc

MANILA OFFICE:

460-B Quirino Highway Brgy. Talipapa, Quezon City
Sales Tel : (02) 8930.1960 / 8939.6652 / 8703.3164
Service Tel : (02) 8332.9092
Email: sales@wilan.com.ph
Website: www.wilan.com.ph

CEBU OFFICE:

Door 2 Rafanan Bldg. Lopez Jaena St.
Brgy. Subangdaku, Mandaue City Cebu
Tel : (032) 272.2891
(032) 272.8166
Email: cebusales@wilan.com.ph